

20X10FT. LUMIERE CONTINUOUS BACKLIT

LUMIERE LIGHT WALL
PRODUCT CODE: LLW8X4BLCON

SINGLE
SIDED

DOUBLE
SIDED

INDOOR
USE

TOOLLESS
SETUP




SET UP INSTRUCTIONS 1/2


Set Up Pop Up Frame



a. Place frame with the adjustable feet facing down.




b. Expand the frame.

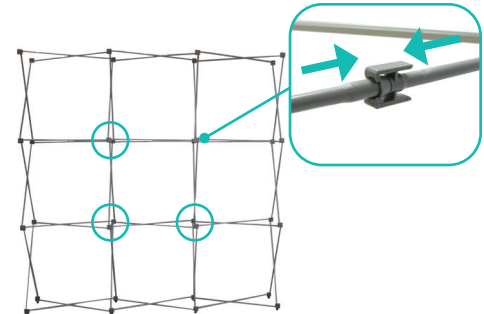


c. Close frame by pushing the outside of the frame until male and female ends connect.


Attach Channel Bars

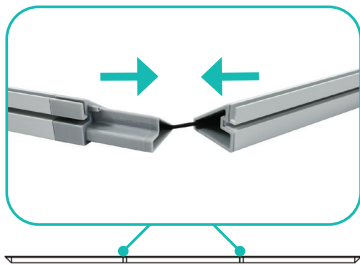

a. Expand each channel bar. Follow bungee to connect.

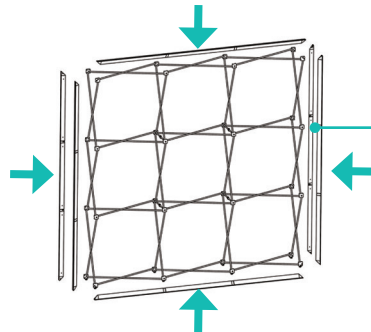

b. Attach channel bars to frame.

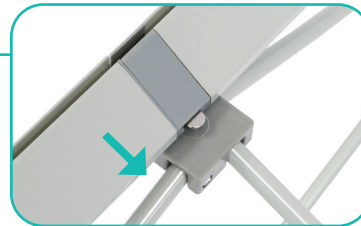

c. Slide channels bars onto frame, from top to bottom, then secure onto metal peg.



d. Attach the top and bottom end caps on each side of the frame.

Unfold The Hooks



a. Locate each hook.



b. Turn each hook outward.



c. Twist each hook to face the front of the ladder light.

Please Note: Lumiere Ladder Light sets are placed on the front side of the frame only

20X10FT. LUMIERE CONTINUOUS BACKLIT

LUMIÈRE LIGHT WALL
PRODUCT CODE: LLW8X4BLCON

SINGLE
SIDED

DOUBLE
SIDED


INDOOR
USE

TOOLLESS
SETUP



SET UP INSTRUCTIONS 2/2

Hook Ladder Lights

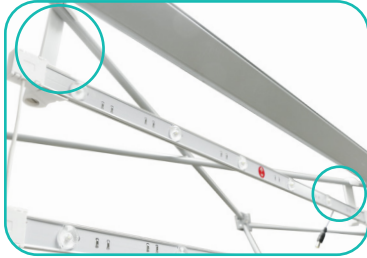


a. Hang ladder lights from top "x" bar. **Note:** Make sure to follow label that says "UP" or "DOWN".




b. Hang ladder lights each section of the frame until reaching the bottom of the frame.

Install Transformer Clip

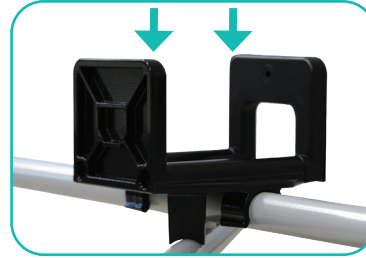


a. Snap Transformer Clip onto each bottom "x" bar.

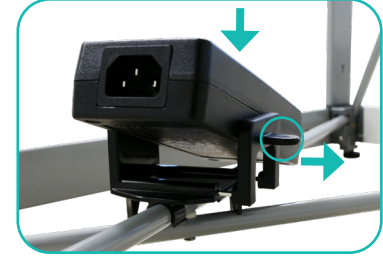

b. While pulling the end tab of the clip, place the Transformer on top of the Transformer clip.

Connect Ladder Lights

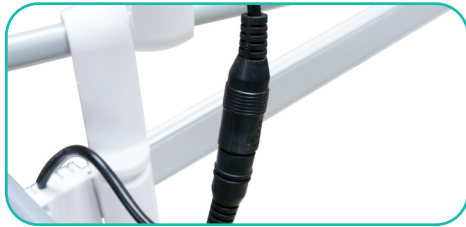

a. Connect each ladder light together using the barrel connectors.



b. Connect bottom set of lights to the LED Driver using the barrel connectors



c. Insert power cord to the LED Driver. Plug other side into your main power outlet.

Install Graphic

*Install graphics after connecting frames. Frame connection instructions are on next page



a. In each corner, insert the silicone edge beading into the groove.




b. Then insert the remainder of the beading. Repeat blockout installation for the back frame.



c. Then repeat graphic installation on the end caps for each side.

SET UP INSTRUCTIONS

Connecting Frames

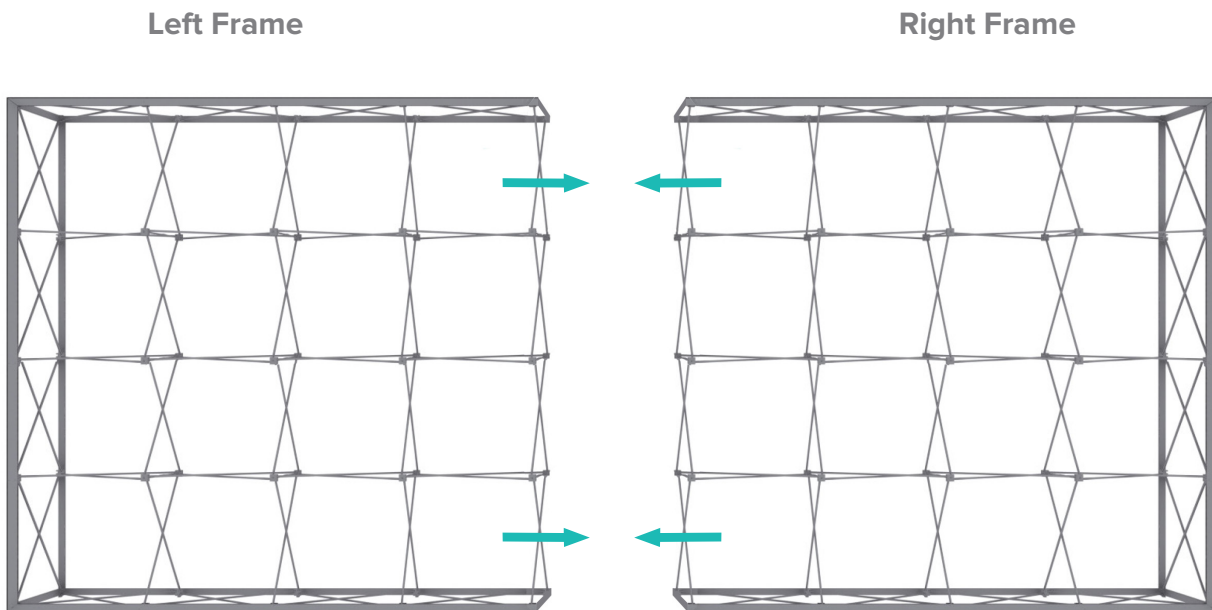


Place the (2) 4x4 frames side by side and connect X-rod with supplied zip ties

Notes:

- Connect frames before installing graphics and ladder lights.
- Do not install the vertical channel bars where the frames will connect.

Frame Connection

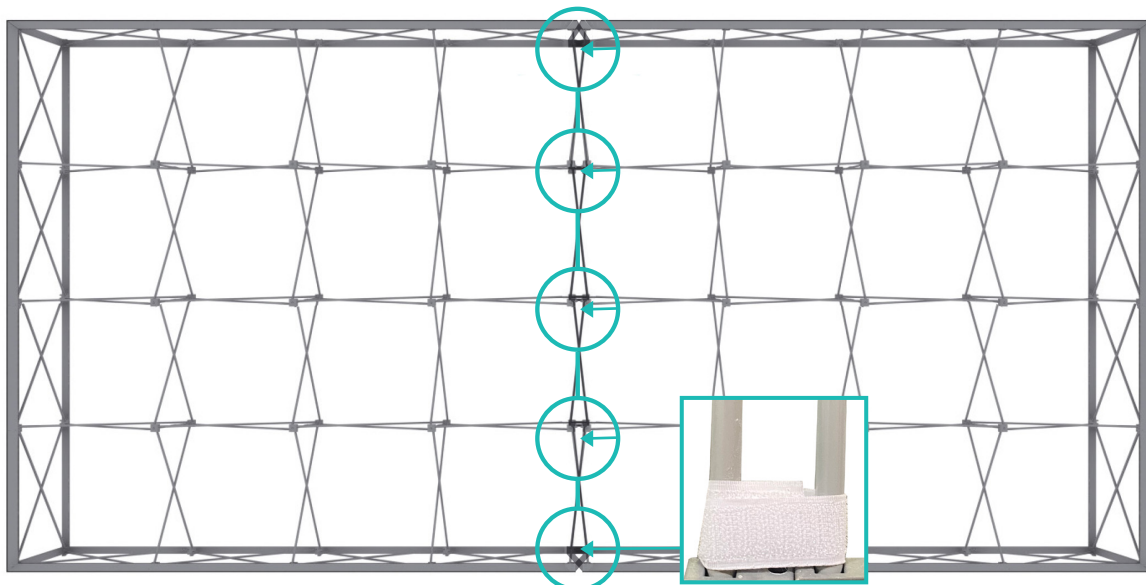

Since the vertical channel bars will create shadows on the graphics they are not used with 1pc graphics. An alternate method to secure frames without using the Channel Bars + LLW-SCON is using the included velcro straps to connect them. Loop the straps around the X-Rods on the front and back of each frame and secure tightly to secure frames. Reference image above for velcro strap