



# Set Up Instructions

## CSNRB-240L


**Step 1:** Assemble all straight pipes with bungee cords by pushing and pulling together.

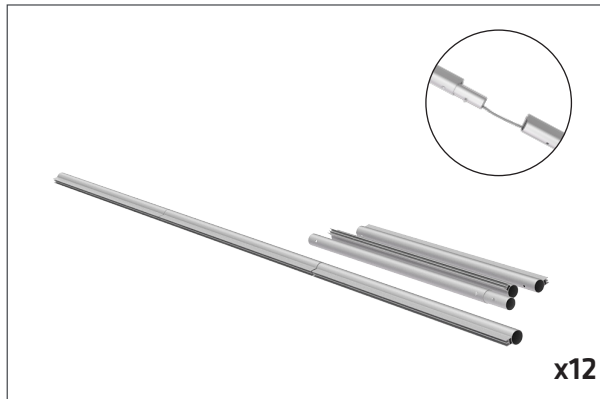


**Step 2:** Connect all corner sections to straight sections of the frame. Blue pipes represent the vertical pole position and should face up and down.

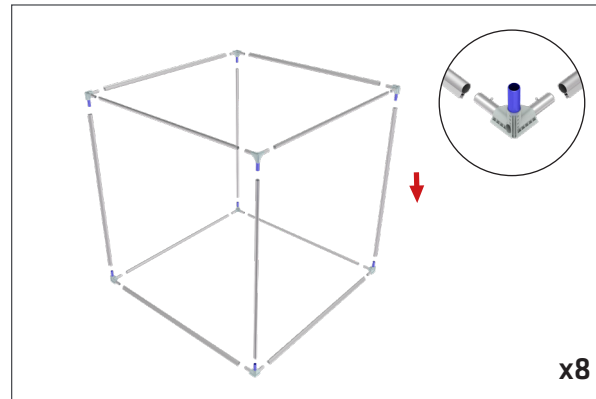

**Step 3:** At the top of the frame insert eyebolts in all 4 corners and add a carabiner to each one. Attach one cable to the carabiners in opposite corners. Complete task twice to form an X.

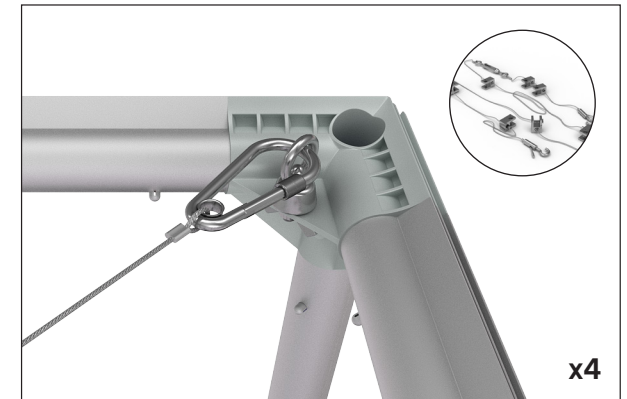



**Step 4:** Move to the center of cable and hand tighten turnbuckle to remove any remaining slack. Do not over tighten.

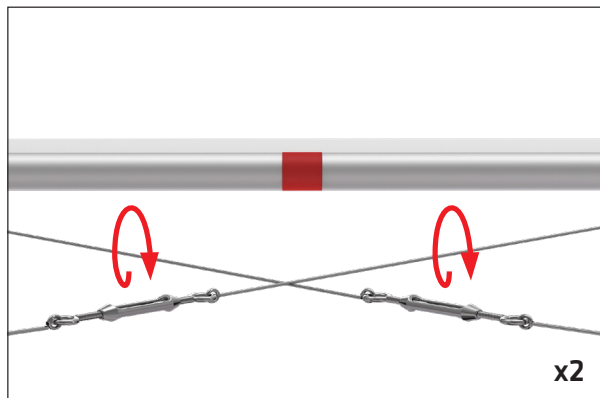

LED Light Arrays



**Step 5:** Take out the LED Light Arrays and add to cable with power connector on top. The cable blocks can be adjusted by pushing the **pin into the block** and sliding the block along the cable into desired position.

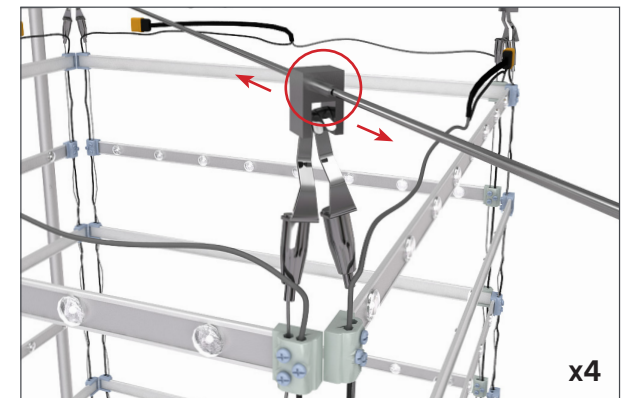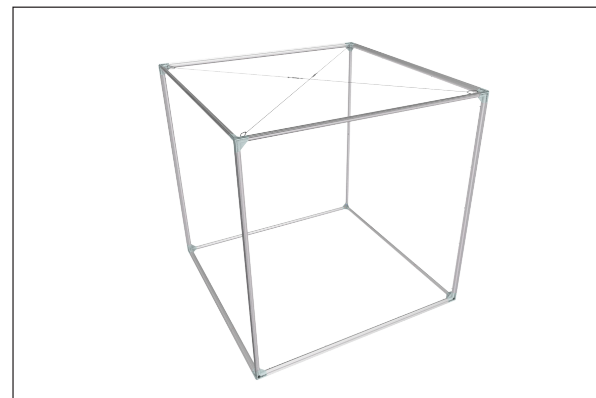


**expandbiz**

expandbizdisplays.com • Tel: 626-727-3716


# Set Up Instructions

## CSNRB-240L


**Step 6:** Completed vertical LED Light Arrays assembly.

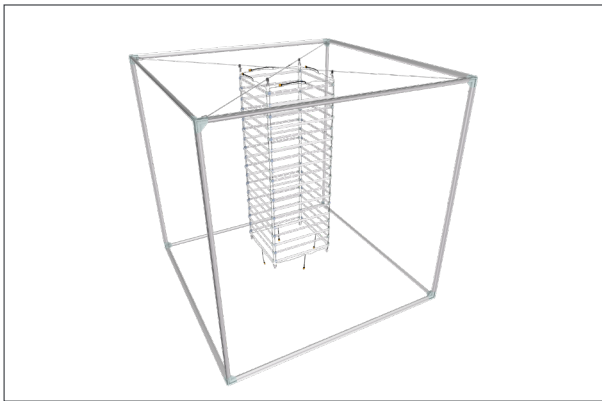

**Step 7:** Attach bottom horizontal LED Light Array to 4 corners of vertical LED Light Arrays.

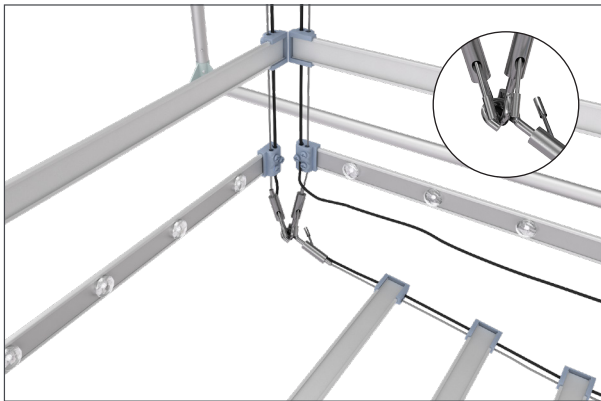


**Step 8:** Attach power cables between bottom and 1 vertical light array. Not all LED Light Arrays need to be plugged in at bottom. 3 plugs will hang freely.

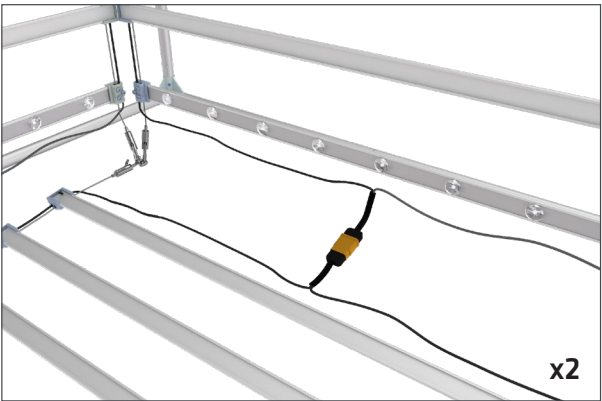


**Use drop cloth on ground to prevent graphics from getting dirty!**


Graphic Diagram

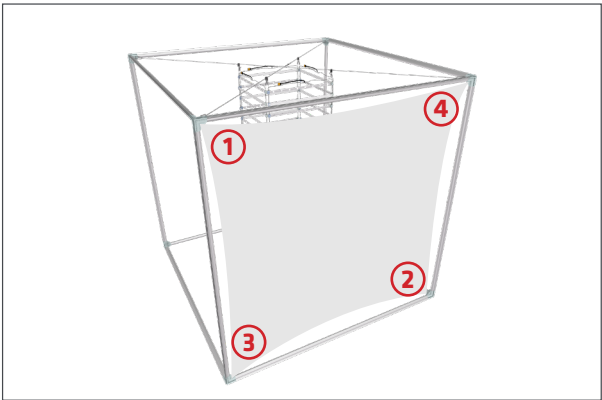

**Step 9:** Fold silicone edge graphics over an install into first corner of frame working outwards 4-6 inches. Repeat on remaining corners starting with the opposite corner. Follow the Graphic Diagram.

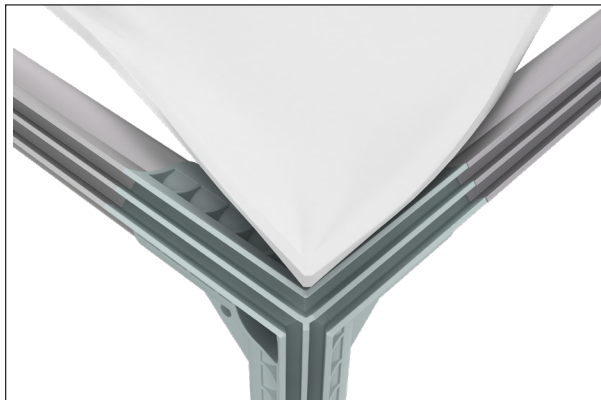

**Step 10:** Move to the center of each side of the frame to continue inserting the silicone edge graphics and work back toward the corners.

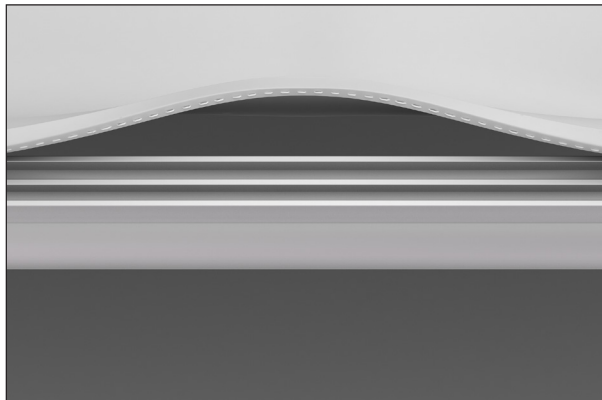


# Set Up Instructions

## CSNRB-240L


**Step 11:** Repeat Steps 9-10 on all 4 sides. Leave installation of bottom graphic until after the display has been wired with harness and lifted overhead into a position where it can be installed from the ground.




**Step 12:** Attach wiring harness to the same carabiners in 4 corners used for the light cables.

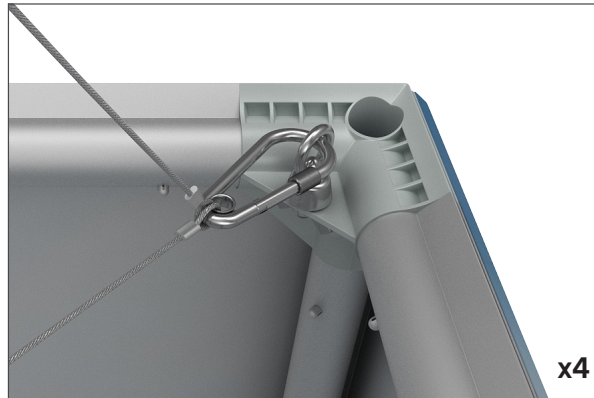


**Step 13:** Attach power supplies to hanging harness. Plug power supplies to the top of LED Light Arrays. 2 LED Light Arrays per 1 power supply.

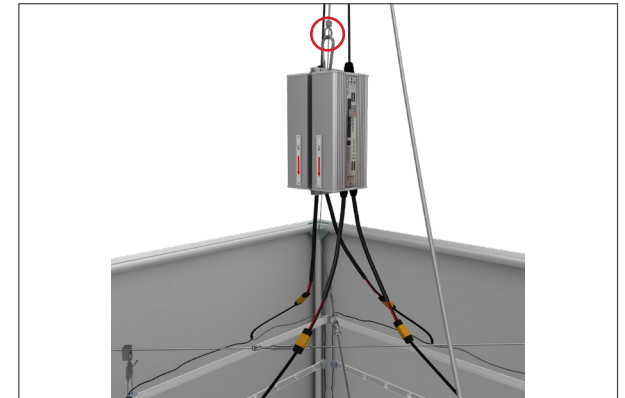

**Step 14:** Test lights if possible to make sure it has been wired properly.

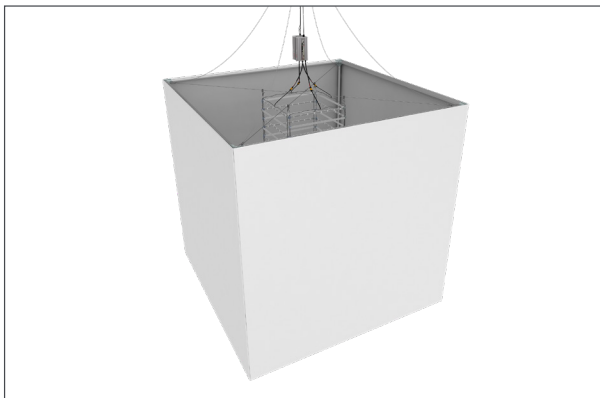

**Step 15:** Lift display into position and install bottom graphic following Steps 9-10.

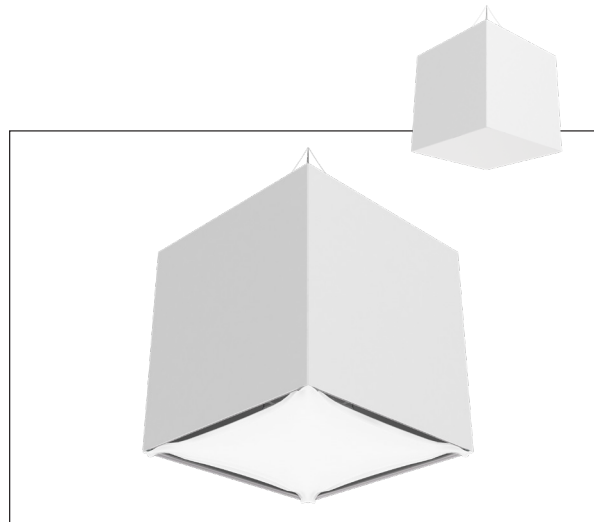

### CAUTION!

Do not connect lights to power when lights are rolled up. Hang lights on frame before connecting to power for testing.

