



# Set Up Instructions

## CSNRT-100S


**Step 1: Assemble all straight pipes with bungee cords** by pushing and pulling together.

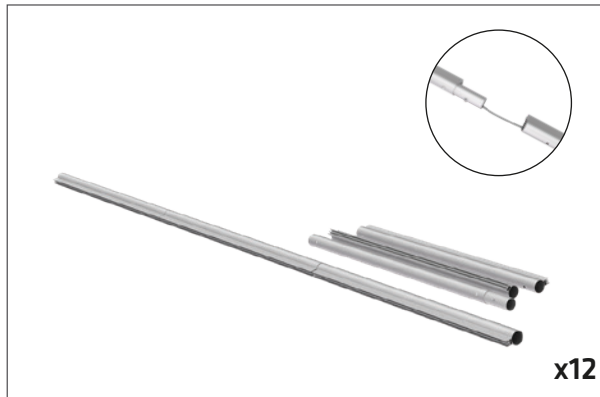


**Step 2: Build first side with connecting pipes.** Connect all corner sections to straight sections of the frame. Blue pipes represent the vertical pole position and should face top and bottom.

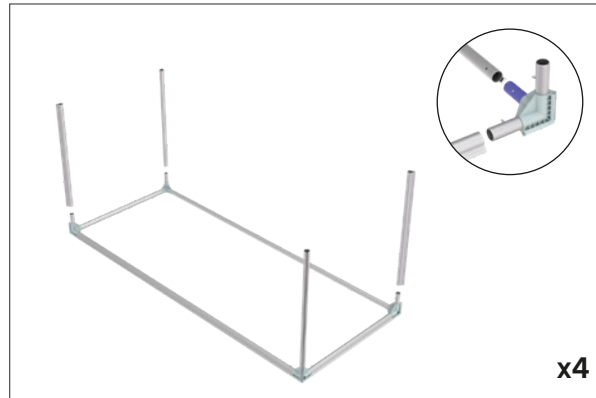


**Step 3: Build and attach second side.** Connect all corner sections to straight sections of the frame. Blue pipes represent the vertical pole position and should face top and bottom. Connect all frames together.

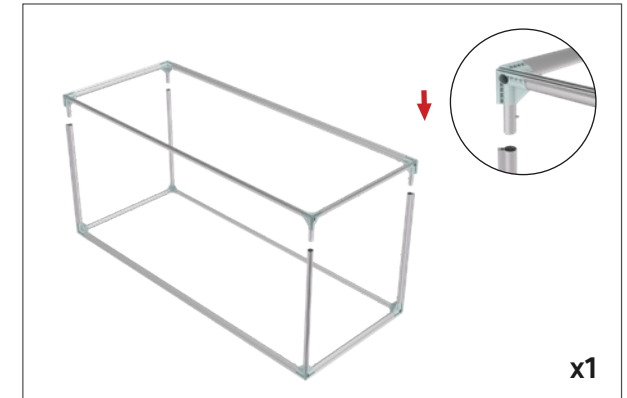

**Step 4: At the top of the frame attach cable to left and right side. Complete task twice to form an X.**

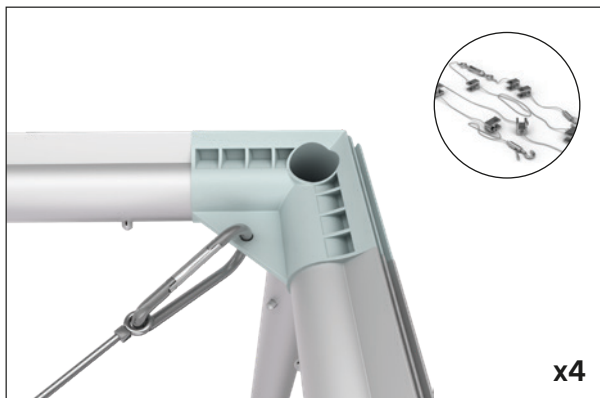

**Step 5: Move to the center of cable and hand tighten turnbuckle to remove any remaining slack. Do not over tighten.**

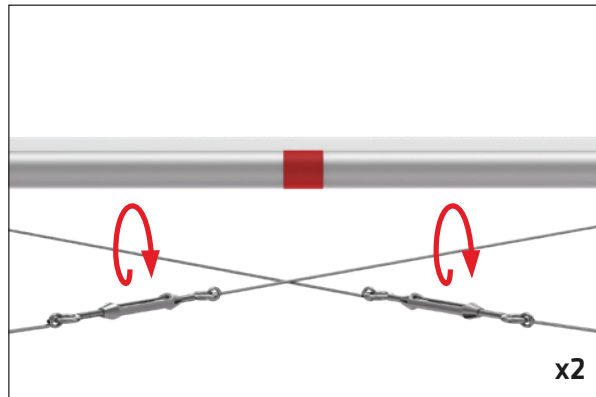

**expandbiz**


expandbizdisplays.com • Tel: 626-727-3716

# Set Up Instructions


# CSNRT-100S

Use drop cloth on ground to prevent graphics from getting dirty!


Graphic Diagram

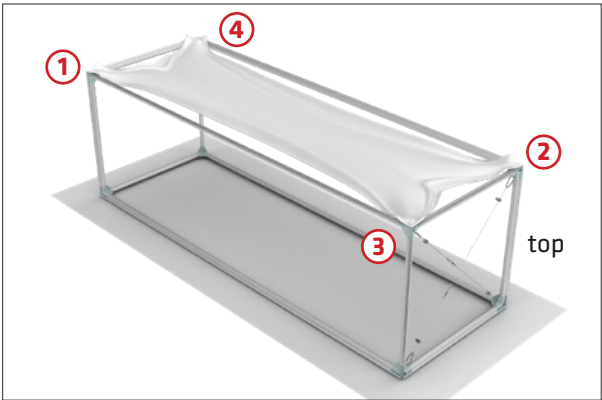

**Step 6:** Fold silicone edge graphics over an install into first corner of frame working outwards 4-6 inches. Repeat on remaining corners starting with the opposite corner. Follow the Graphic Diagram.

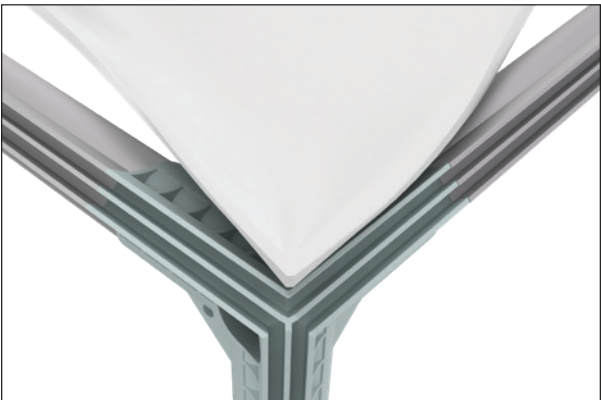


**Step 7:** Move to the center of each side of the frame to continue inserting the silicone edge graphics and work back toward the corners.

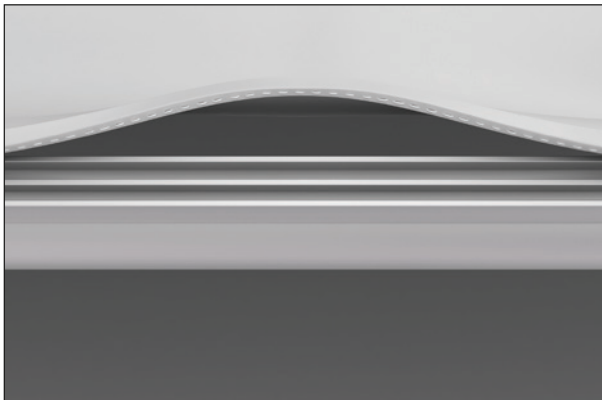

**Step 8:** Repeat Steps 6-7 until 3 sides are complete. Leave installation of fourth graphic until after the LED Light Arrays have been installed.

**Step 9:** Insert feet into 4 corners of the frame base.

**Step 10:** Lift tower into upright position with hanging cables for lights at the top.

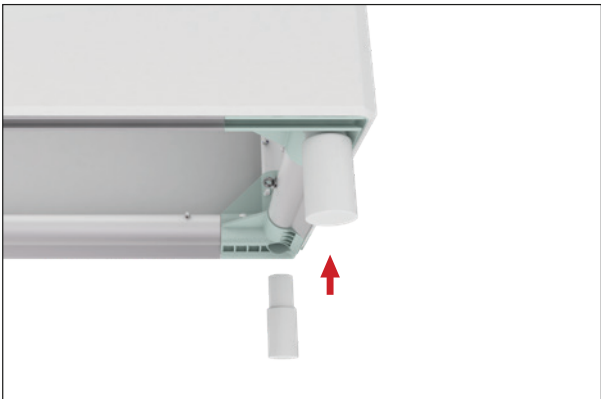

**expandbiz**

expandbizdisplays.com • Tel: 626-727-3716


# CSNRT-100S

## Set Up Instructions

This step will require a ladder or step stool.


**Step 11:** Take out the LED Light Arrays and add to cable blocks with power connector at the bottom.

The cable blocks can be adjusted by pushing the **pin into the block** and sliding the block along the cable into desired position.

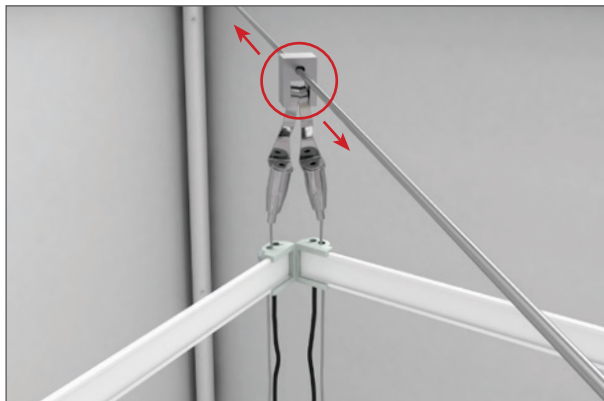

**Step 14:** Plug power supplies into the top of LED Light Arrays. 2 LED Light Arrays per power supply.

**Step 15:** Move tower to final display position and place power supplies inside tower. Repeat Steps 6-7 to install final graphic with the tower in the upright position.

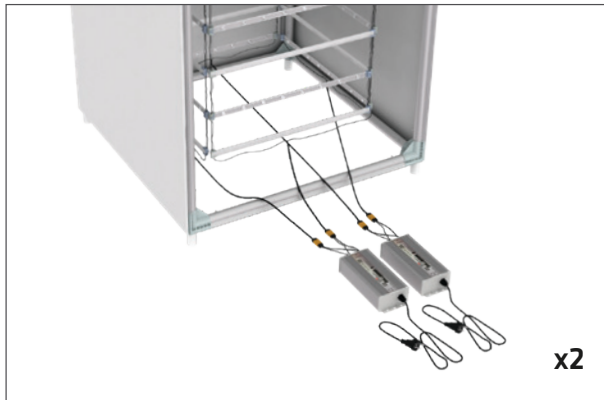

### CAUTION!

Do not connect lights to power when lights are rolled up. Hang lights on frame before connecting to power for testing.



**expandbiz**

expandbizdisplays.com • Tel: 626-727-3716