

LUMIÈRE CONFIGURATION - D

LUMIÈRE LIGHT WALL


PRODUCT CODE: LLW20D



On frame On graphic



Shown with optional feet

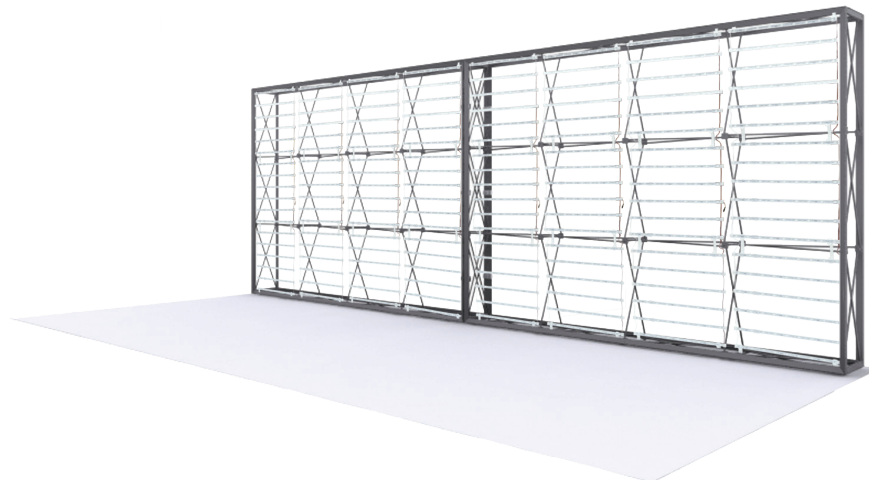

Straight Connector

PRODUCT DESCRIPTION

Illuminate your message with the Lumiere Light Wall! Lumiere ladder lights make backlit graphics pop on this innovative combo display of silicone-edge graphics and portable RPL fabric pop ups. Plus, the Lumiere shrinks down in size: simply collapse the geometric frame and the SEG bungeed channel bars, and fold or roll the fabrics graphics. Setup requires 1 person and 5-10 minutes. SEG portability is easy and stylish.

DISPLAY DIMENSION	236.2" W x 88.6" H x 14.5" D
--------------------------	------------------------------

GRAPHIC DIMENSIONS

4X3 MAIN GRAPHICS	118.5" W x 89" H (4 Graphics)
4X3 END CAP GRAPHICS	14.25" W x 89" H (2 Graphics)

FRAME CONFIGURATION QUANTITY

4X3 FRAME	2 Frames
------------------	----------

GRAPHIC MATERIAL

UV Backlit Fabric

GRAPHIC FINISHING

Silicone beading is sewn around the perimeter of the fabric graphic. Silicone beading is hidden from view once installed.

DISPLAY CONSTRUCTION

Aluminum Frame

LADDER LIGHTS SPECIFICATION

EACH LIGHT BEAD	1.0W
ANGLE	170°
OPERATING VOLTAGE	DC12V/24V
TOTAL WATTAGE	840W
TOTAL AMPERAGE	36A

TRANSFORMER SPECIFICATION

OUTPUT	24V/3.75A
INPUT	AC100-240V/1.3A

SHIPPING WEIGHTS & DIMENSIONS

Lumiere Ladder Lights - 4 Units (2 Boxes)	
Shipping Weight	29 lbs
Shipping Dimensions	14" L x 12.5" W x 32.5" H
4x3 Lumiere Light Wall (2 boxes total)	
Shipping Weight	35 lbs (frame only) (each box) 39 lbs (with graphics) (each box)
Shipping Dimensions	34" L x 14" W x 9" H (each box)

GRAPHIC TURN AROUND TIME

2 business days after proof approval

AVAILABILITY	CA and PA
---------------------	-----------

Please Note: Lumiere Ladder Light sets are placed on the front side of the frame only. They are not double-sided and may not be used as so.

LUMIÈRE CONFIGURATION - D

LUMIÈRE LIGHT WALL

PRODUCT CODE: LLW20D

AVAILABLE ACCESSORIES



La Caja Case



Genie Counter Case



Internal Showcase



Lumiere Jumper Cable*



Qty 4 -Stabilization Feet

***Note:** Lumiere Jumper Cable is used to connect the Lumiere Ladder Lights between the Internal Showcase.

LUMIÈRE CONFIGURATION - D

LUMIÈRE LIGHT WALL

PRODUCT CODE: LLW20D

PARTS LIST



Qty 2 - 4x3 Pop Up Frame



Qty 8 - 4 Section
Channel Bars



Qty 8 - 3 Section
Channel Bars



Qty 8 - End Cap
Channel Bars




Qty 2 - Carry Bags



Qty 4 - Channel Bar Bags



Qty 6 - Straight Connectors

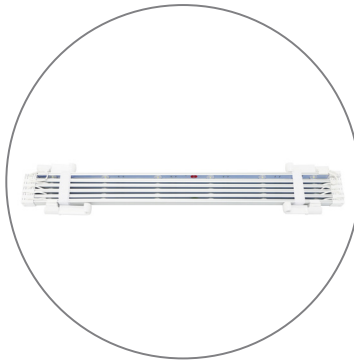

Qty 8 - Ladder Light Sets



Qty 8 - Transformers



Qty 8 - Transformer Power Cords



Qty 8 - Ladder Light
Travel Bags

LUMIÈRE CONFIGURATION - D


LUMIÈRE LIGHT WALL
PRODUCT CODE: LLW20D

SET UP INSTRUCTIONS 1/2


Set Up Pop Up Frame



a. Place frame with the adjustable feet facing down.




b. Expand the frame.

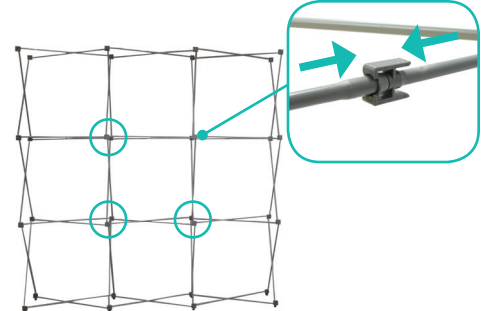


c. Close frame by pushing the outside of the frame until male and female ends connect.


Insert Channel Bars

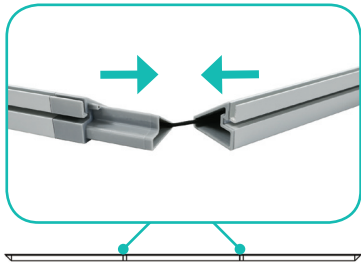

a. Expand each channel bar. Follow bungee to connect.

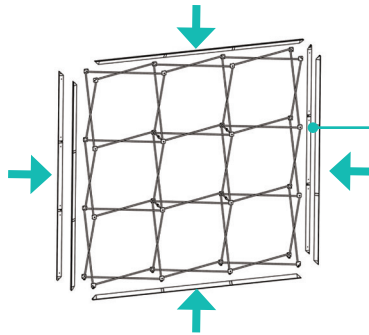

b. Attach channel bars to frame.

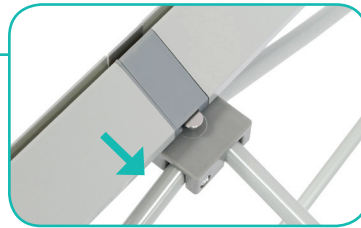

c. Slide channels bars onto frame, from top to bottom, then secure onto metal peg.



d. Attach the top and bottom end-caps on each side of the frame.

Unfold The Hooks



a. Locate each hook.



b. Turn each hook outward.



c. Twist each hook to face the front of the ladder light.

LUMIÈRE CONFIGURATION - D

LUMIÈRE LIGHT WALL

PRODUCT CODE: LLW20D

SET UP INSTRUCTIONS 2/2

Hook Ladder Lights



a. Hang ladder lights from top "x" bar. **Note:** Make sure to follow label that says "UP" or "DOWN".



b. Hang ladder lights in each section of the frame until reaching the bottom of the frame.

Connect Ladder Lights



a. Connect each ladder light together using the barrel connectors.



b. Connect bottom set of lights to the LED Driver using the barrel connectors



c. Insert power cord to the LED Driver. Plug other side into your main power outlet.

Install Graphic



a. In each corner, insert the silicone edge beading into the groove.



b. Then insert the remainder of the beading. Repeat blackout installation for the back frame.




c. Then repeat graphic installation on the end caps for each side.

LUMIÈRE CONFIGURATION - D

LUMIÈRE LIGHT WALL
PRODUCT CODE: LLW20D

SET UP INSTRUCTIONS

Connecting Wall

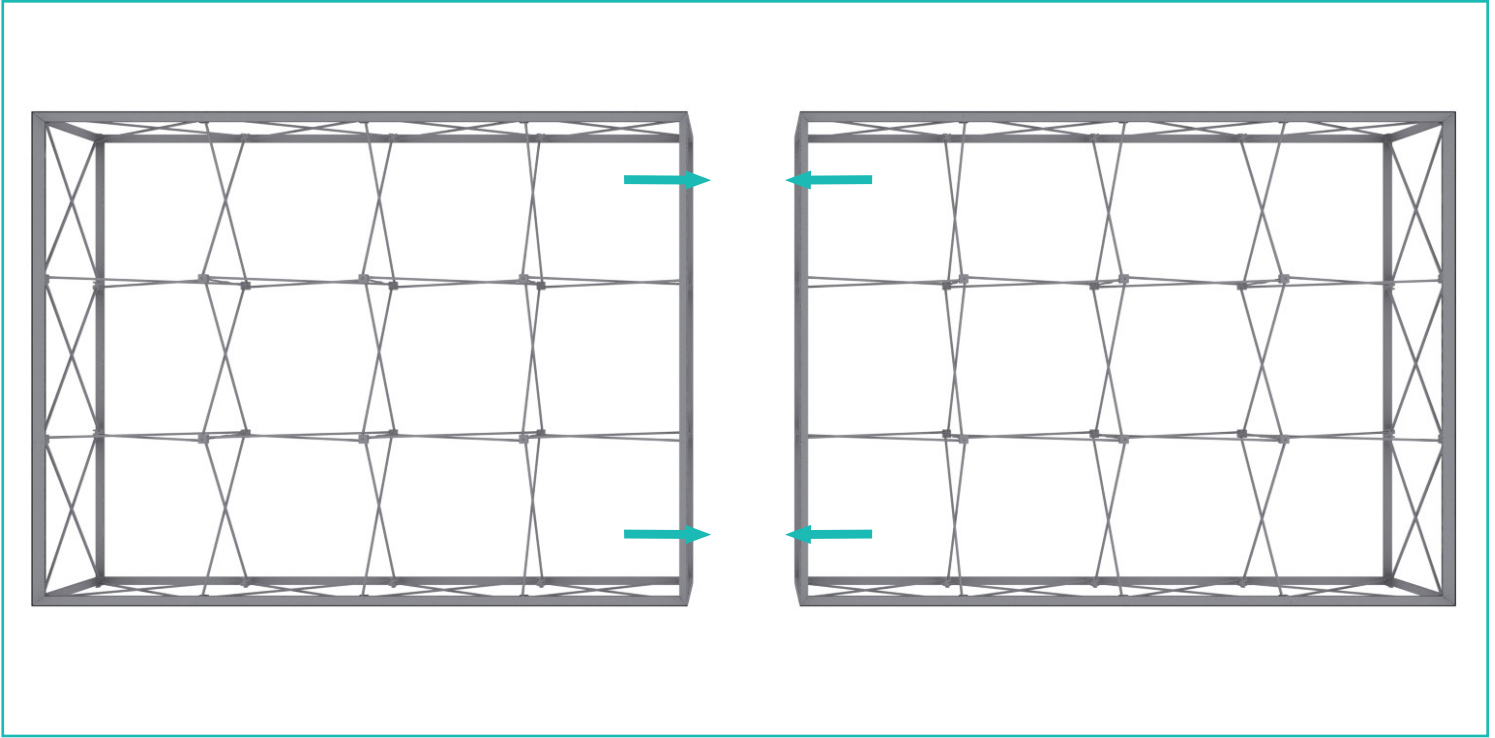


Place the (2) 4x3 frames side by side.

Note: Rendering shown without graphics for clarity.


Straight Connection




*Starting from behind, make sure the frames are flushed next to each other.

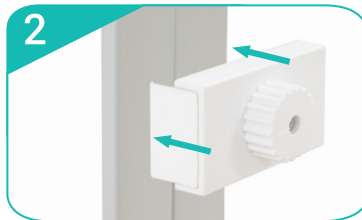

Slide Straight Connector onto the channel bars of both frames.

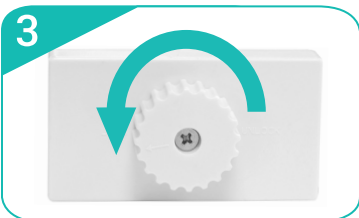

Turn dial to the left to lock the Straight Connector in place. Repeat for each vertical sections (6 total).

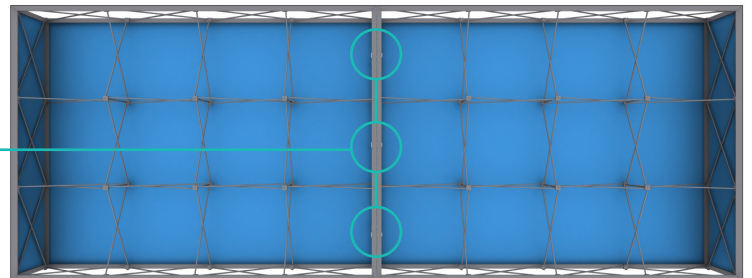


*Back side of the 4x3's shown above.

LUMIÈRE CONFIGURATION - D

LUMIÈRE LIGHT WALL
PRODUCT CODE: LLW20D

TEMPLATE GUIDE

Front View

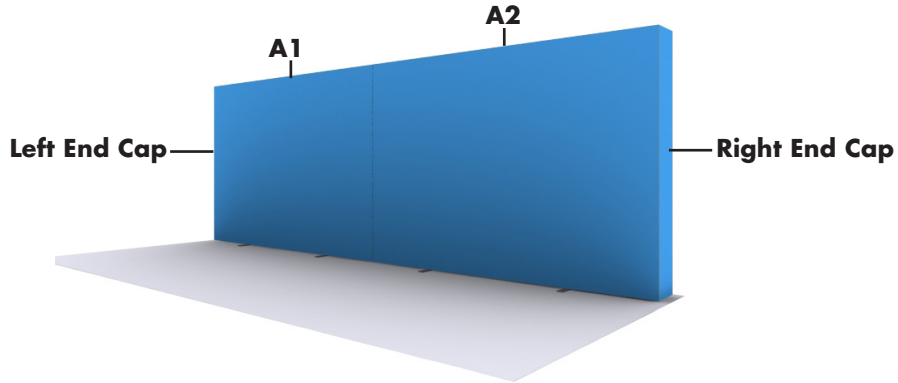

Back View

